

EDS-305-M12 Series

5-port M12/IP67 unmanaged Ethernet switches



- > M12 connectors and IP67 rated case
- > 10/100BaseT(X), 4-pin M12 (D-coding), F/H duplex mode, and auto MDI/MDI-X connection
- > Power input: 12 to 45 VDC, 18 to 30 VAC
- > -40 to 75°C operating temperature range (T models)

The certification logos shown here apply to some or all of the products in this section. For details, see "Regulatory Approvals" under "Specifications" below.



Introduction

The EDS-305-M12 series Ethernet switches are IP67 rated for the toughest industrial applications, which means that the rugged housing and connectors guard against dust, water, and oil. By using M12 connectors, you can rest assured that Ethernet cables will connect tightly to the switch, and will be robust enough to protect your

applications from external disturbances, such as the vibration and shock encountered in the transportation industry. The space-saving EDS-305-M12 switches can be mounted virtually anywhere, and wide operating temperature (-40 to 75°C) models are also available for use in the extremest of conditions.

Specifications

Technology

Standards:

- IEEE 802.3 for 10BaseT
- IEEE 802.3u for 100BaseT(X)
- IEEE 802.3x for Flow Control

Processing Type: Store and Forward

Flow Control: IEEE 802.3x full duplex, back pressure flow control

Interface

M12 Ports: 10/100BaseT(X) auto negotiation speed, F/H duplex mode, and auto MDI/MDI-X connection

LED Indicators: Power, LNK/ACT

Power Requirements

Input Voltage:

- 12 to 45 VDC
- 18 to 30 VAC (47 to 63 Hz)

Input Current:

- 0.12A @ 24 VDC
- 0.28A @ 24 VAC

Overload Current Protection: 1.1 A (Limited Current)

Connection: 1 M12 socket (A-coding), single power input

Reverse Polarity Protection: Present

Physical Characteristics

Housing: Plastic, IP67 protection

Dimensions: 60 x 125 x 29.6 mm (2.36 x 4.92 x 1.17 in)

Weight: 250 g

Installation: Field-style mounting, DIN-Rail mounting (with optional kit)

Environmental Limits

Operating Temperature:

- Standard Models: 0 to 60°C (32 to 140°F)
- Wide Temp. Models: -40 to 75°C (-40 to 167°F)

Storage Temperature: -40 to 85°C (-40 to 185°F)

Ambient Relative Humidity: 5 to 95% (non-condensing)

Regulatory Approvals

Safety: UL508

EMI: FCC Part 15, CISPR (EN55022) class A

EMS:

- EN61000-4-2 (ESD), level 3
- EN61000-4-3 (RS), level 4
- EN61000-4-4 (EFT), level 3
- EN61000-4-5 (Surge), level 3
- EN61000-4-6 (CS), level 2
- EN61000-4-8
- EN61000-4-11

Maritime: DNV (Pending), GL (Pending)

Rail Traffic: EN50155 (Environmental), EN50121-4 (Pending), EN50121-3-2 (Pending)

Shock: IEC 60068-2-27

Freefall: IEC 60068-2-32

Vibration: IEC 60068-2-6

Note: Please check Moxa's website for the most up-to-date certification status.

MTBF (mean time between failures)

Time: 636,000 hrs


Database: Telcordia (Bellcore), GB

Warranty

Warranty Period: 5 years

Details: See www.moxa.com/warranty

Dimensions (unit = mm)

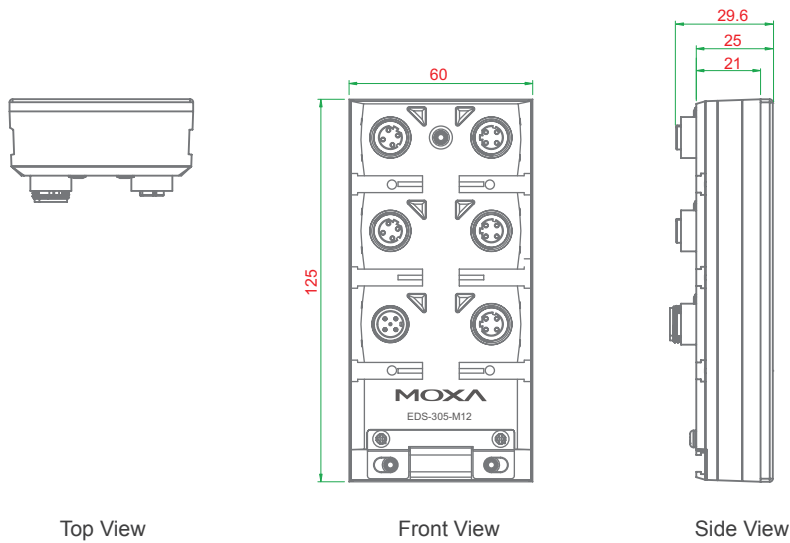

Ordering Information

Available Models

EDS-305-M12: Industrial M12/IP67 unmanaged Ethernet switch with 5 10/100BaseT(X) ports, 0 to 60°C operating temperature

EDS-305-M12-T: Industrial M12/IP67 unmanaged Ethernet switch with 5 10/100BaseT(X) ports, -40 to 75°C operating temperature



Optional Accessories (can be purchased separately)

DR-4524/75-24/120-24: 45/75/120 W DIN-Rail 24 VDC power supplies



DK-M12-305: DIN-Rail mounting kit for the EDS-305-M12 series

M12 Patch Cords and Sensor Connectors:

M12 Patch Cords

	CBL-M12D(MM4P)/RJ45-100 IP67	1-meter M12-to-RJ45 Cat-5E UTP Ethernet cable with waterproof 4-pin D-coded M12 connector
	CBL-M12(FF5P)/OPEN-100 IP67	1-meter M12-to-5-pin power cable with waterproof 5-pin A-coded M12 connector

Sensor Connectors

	M12D-4P-IP68	Field-installable D-coded screw-in sensor connector, male
	M12A-5P-IP68	Field-installable A-coded screw-in sensor connector, female